


MU 2075 ELITE DOOR



HIGH PERFORMANCE
THERMALLY-
INSULATED DOORS
FOR COMMERCIAL
AND DOMESTIC
APPLICATIONS

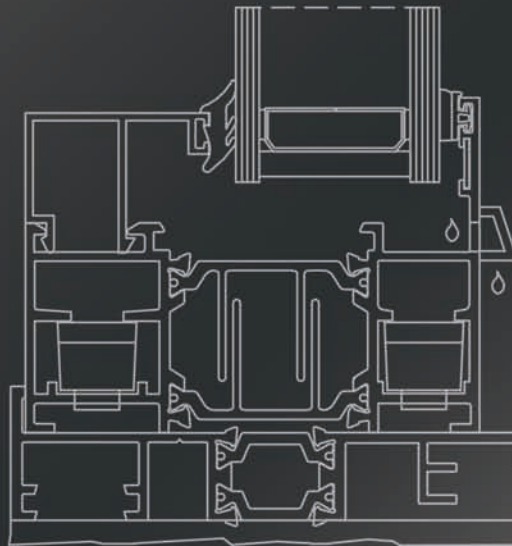

UNIVERSAL
ALUMINIUM SYSTEMS

MU 2075 ELITE DOOR

THIS FULLY INTEGRATED SYSTEM INCORPORATES A NUMBER OF ADVANCED DESIGN FEATURES FOR HEAVY DOMESTIC AND COMMERCIAL APPLICATIONS.

The Universal 2075 Elite Door has advanced thermal and sound insulation characteristics generated by the use of a multi-cavity glass re-enforced 34mm polyamide barrier and triple sealing gaskets and the provision for glazing units of up to 65mm thick.

The doors include a number of design options for increased security and DDA operation. All thresholds and cills are fully compatible for inward or outward opening.

MU 2075 FEATURES

- ▶ MAX HEIGHT 2.5m X 1.1m SINGLE DOOR
- ▶ SUSTAINABLE MATERIAL IN LINE WITH 'GREEN GUIDE' & 'BREEAM' REQUIREMENTS
- ▶ AVAILABLE WITH MANY LOCK VARIATIONS INCLUDING ELECTRIC STRIKE OPTIONS AND USES WINKHAUS AV2 MULTI-POINT LOCKING SYSTEM FOR ADDED SECURITY IN DOMESTIC APPLICATIONS
- ▶ AVAILABLE AS AN OPEN-IN OR OPEN-OUT DOOR
- ▶ COMPATIBLE WITH ALL UNIVERSAL GFT, CURTAIN WALL AND WINDOW SYSTEMS
- ▶ MULTI MID-RAIL OPTIONS
- ▶ UP TO 65MM GLAZING
- ▶ AVAILABLE AS FULL-FRAME OR LOW-THRESHOLD OPTION
- ▶ TRIPLE SEALING BY MULTI-CAVITY CENTRAL AND EXPANDABLE EPDM GASKETS
- ▶ EASY ASSEMBLY WITH MECHANICALLY CLEATED PROFILES

PERFORMANCE (OPEN IN)

- ▶ BS6375 PT1: 2009
- ▶ AIR LEAKAGE – 600 PA
- ▶ WATER LEAKAGE – 450 PA
- ▶ WIND RESISTANCE – 2400 PA
- ▶ WIND RESISTANCE SAFETY – 3600 PA
- ▶ THERMAL PERFORMANCE – UW1.4 (DOUBLE GLAZED)



Universal Customer Support
Call: 0117 955 9091



UNIVERSAL
ALUMINIUM SYSTEMS

Universal House, Pennywell Rd, Bristol BS5 0ER
Tel: +44 (0)117 955 9091
Fax: +44 (0)117 955 6091
sales@universal-aluminium.co.uk
www.universal-aluminium.co.uk